



Electrostatics: *Electrostatic Materials*

EE3321

Electromagnetic Field Theory

Outline



- General classes of electromagnetic materials
- Boundary conditions for dielectric-dielectric interface
- Refraction of static fields at a dielectric-dielectric interface
- Boundary conditions for dielectric-conductor interface
- Examples

General Classes of Electromagnetic Materials

Classification by Conductivity



Insulator

$$\sigma \ll 1$$

Semiconductor

Conductor

$$\sigma \gg 1$$

Boundary Conditions for Dielectric-Dielectric Interface

What Are Boundary Conditions?




We often solve electromagnetic problems using differential equations.

$$\frac{d^2 E}{dz^2} + k^2 E = 0$$

$$\frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} = 0$$

The problem is that derivatives are infinite at discontinuities.

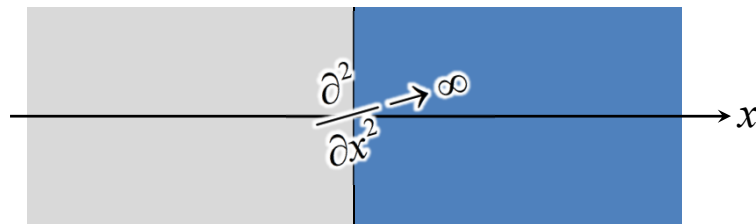


What Are Boundary Conditions?



We are forced to solve our differential equations in each homogeneous region separately.

...and then connect our solutions via boundary conditions.

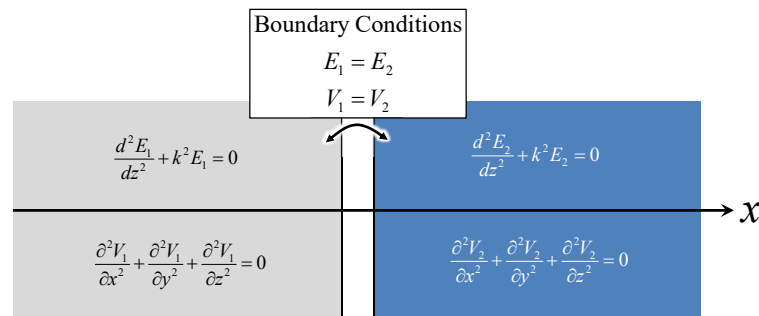

Electrostatic Devices

Slide 7

Deriving Boundary Conditions



Integral equations do not require boundary conditions as long as they do not contain derivatives.

For this reason, we will derive our boundary conditions using Maxwell's equations in integral form.


$$0 = \oint_L \vec{E} \cdot d\vec{\ell} \implies \text{Boundary conditions for tangential electric fields.}$$


$$Q = \oiint_S \vec{D} \cdot d\vec{s} \implies \text{Boundary conditions for normal electric fields.}$$

Electrostatic Devices

Slide 8

Analysis Setup



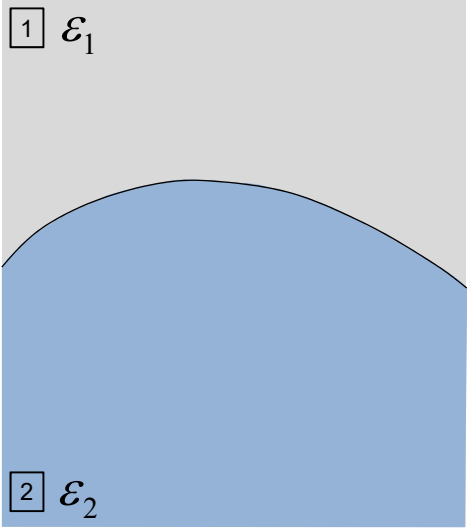


1 ϵ_1


2 ϵ_2

Let's examine the interface between two different dielectrics.

Electrostatic Devices
Slide 9

Analysis Setup



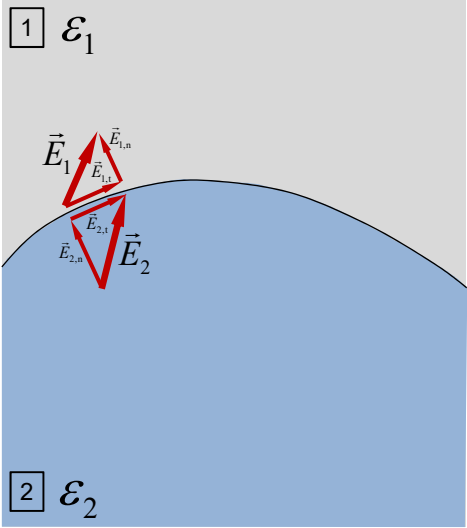

1 ϵ_1

2 ϵ_2


Let's examine the interface between two different dielectrics.


We wish to examine the relation between electric fields on either side of the interface, so that if one is known the other can be calculated.

It will be useful to separate the field on either side of the interface into tangential and normal components.

Electrostatic Devices
Slide 10

Derivation of Tangential BCs



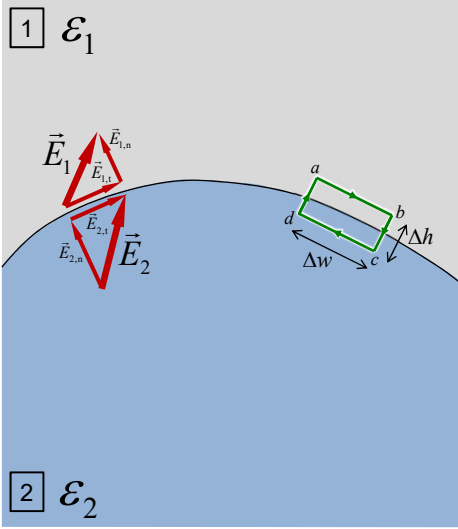

The diagram shows a curved interface between two dielectric media with permittivities ϵ_1 (top) and ϵ_2 (bottom). A rectangular path is drawn across the interface, with vertices labeled a, b, c, d . The width of the path is Δw and its height is Δh . Electric field vectors \vec{E}_1 and \vec{E}_2 are shown in the media, with their tangential components $\vec{E}_{1,t}$, $\vec{E}_{2,t}$ and normal components $\vec{E}_{1,n}$, $\vec{E}_{2,n}$ indicated by red arrows.

Apply the following integral to a closed path spanning some section of the interface.


$$0 = \oint_L \vec{E} \cdot d\vec{\ell}$$


$$= \int_a^b \vec{E} \cdot d\vec{\ell} + \int_b^c \vec{E} \cdot d\vec{\ell} + \int_c^d \vec{E} \cdot d\vec{\ell} + \int_d^a \vec{E} \cdot d\vec{\ell}$$

$$= E_{1,t} \Delta w - E_{1,n} \frac{\Delta h}{2} - E_{2,n} \frac{\Delta h}{2} - E_{2,t} \Delta w + E_{2,n} \frac{\Delta h}{2} + E_{1,n} \frac{\Delta h}{2}$$

Electrostatic Devices
Slide 11

Derivation of Tangential BCs



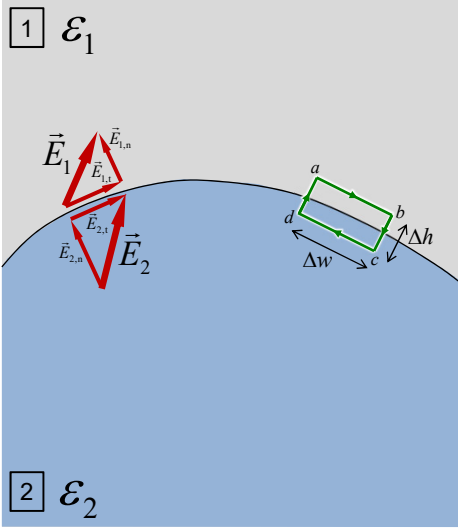

The diagram is identical to the one in Slide 11, showing the interface, the rectangular path, and the electric field vectors.

Cancel like terms with opposite sign.

$$0 = E_{1,t} \Delta w - \cancel{E_{1,n} \frac{\Delta h}{2}} - \cancel{E_{2,n} \frac{\Delta h}{2}} - E_{2,t} \Delta w + \cancel{E_{2,n} \frac{\Delta h}{2}} + \cancel{E_{1,n} \frac{\Delta h}{2}}$$


$$= E_{1,t} \Delta w - E_{2,t} \Delta w$$

From this, we conclude that the tangential component of E is continuous across the interface.


$$\vec{E}_{1,t} = \vec{E}_{2,t}$$

Electrostatic Devices
Slide 12

Derivation of Tangential BCs



1 \mathcal{E}_1

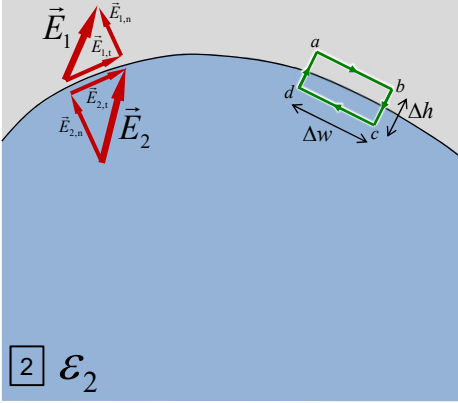

2 \mathcal{E}_2

Apply the constitutive relation to get the boundary condition for D .


$$\vec{E}_{1,t} = \vec{E}_{2,t}$$

$$\frac{\vec{D}_{1,t}}{\epsilon_1} = \frac{\vec{D}_{2,t}}{\epsilon_2}$$


The tangential component of D is NOT continuous across the interface, but the ratio of D/ϵ is.

Electrostatic Devices
Slide 13

Derivation of Normal BCs



1 \mathcal{E}_1

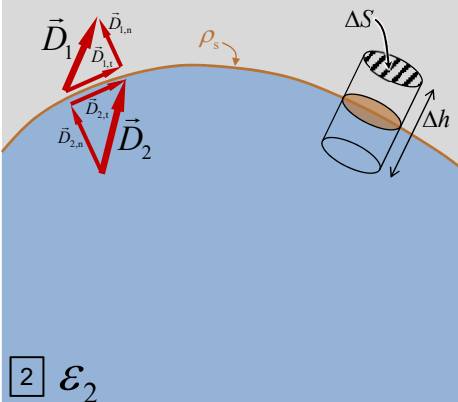

2 \mathcal{E}_2

We place some charge density ρ_s on the surface.

Apply the following surface integral to a pillbox spanning the interface.

$$Q = \oiint_s \vec{D} \cdot d\vec{s}$$

Separate the closed-surface integral into three separate surface integrals.


$$Q = \iint_{\text{top}} \vec{D} \cdot d\vec{s} + \iint_{\text{bottom}} \vec{D} \cdot d\vec{s} + \iint_{\text{sides}} \vec{D} \cdot d\vec{s}$$

Electrostatic Devices
Slide 14

Derivation of Normal BCs



1 \mathcal{E}_1

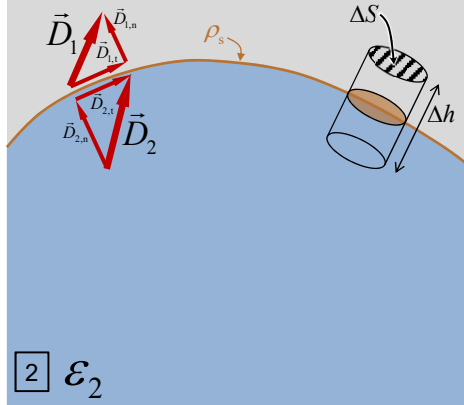

In the limit as $\Delta h \rightarrow 0$

$$Q = \iint_{\text{top}} \vec{D} \cdot d\vec{s} + \iint_{\text{bottom}} \vec{D} \cdot d\vec{s} + \cancel{\iint_{\text{sides}} \vec{D} \cdot d\vec{s}}$$

$$= D_{1,n} \Delta S - D_{2,n} \Delta S$$

The total charge encompassed within the pillbox is

$$Q = \rho_s \Delta S$$

Putting these together gives

$$\rho_s \Delta S = D_{1,n} \Delta S - D_{2,n} \Delta S$$


Electrostatic Devices

Slide 15

Derivation of Normal BCs



1 \mathcal{E}_1

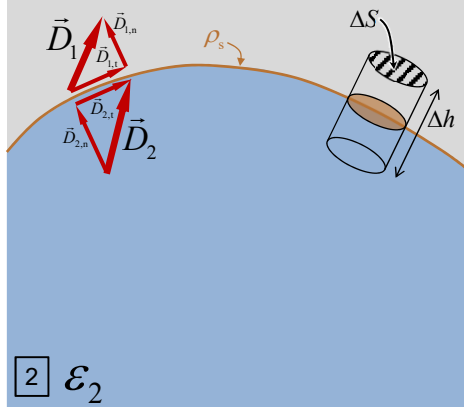

The final boundary condition is then

$$\rho_s \Delta S = D_{1,n} \Delta S - D_{2,n} \Delta S$$

$$\boxed{\vec{D}_{1,n} - \vec{D}_{2,n} = \rho_s}$$

In the absence of charge (i.e. $\rho_s = 0$)

$$\boxed{\vec{D}_{1,n} = \vec{D}_{2,n} \quad (\rho_s = 0)}$$


Electrostatic Devices

Slide 16

Derivation of Normal BCs



1 ϵ_1

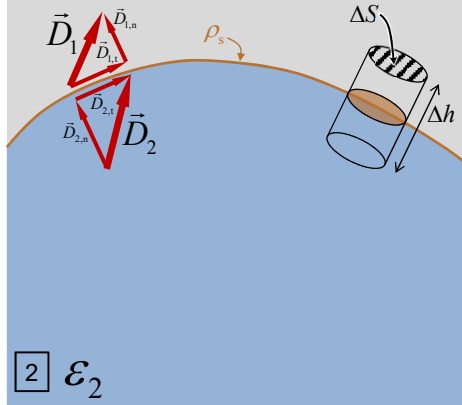

Apply the constitutive relation to get the boundary condition for E .

$$\vec{D}_{1,n} - \vec{D}_{2,n} = \rho_s$$

$$\epsilon_1 \vec{E}_{1,n} - \epsilon_2 \vec{E}_{2,n} = \rho_s$$

In the absence of charge (i.e. $\rho_s = 0$)

$$\epsilon_1 \vec{E}_{1,n} = \epsilon_2 \vec{E}_{2,n} \quad (\rho_s = 0)$$

The normal component of E is NOT continuous across the interface, but the product of ϵE is.


2 ϵ_2

Electrostatic Devices

Slide 17

Refraction of Static Fields at a Dielectric-Dielectric Interface

Analysis Setup

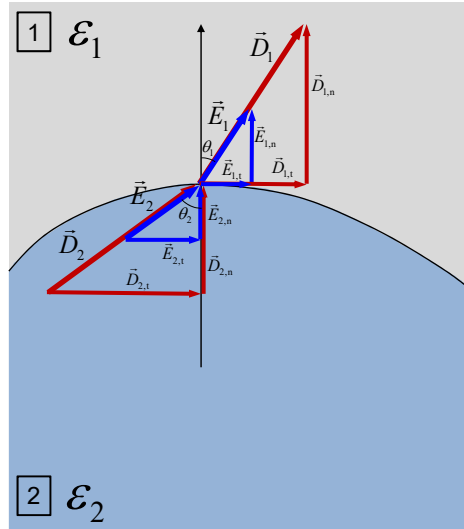


We want a single equation that relates θ_1 , θ_2 , ϵ_1 , and ϵ_2 without any field quantities in the equation.

Given the angles θ_1 and θ_2 , the field components can be written as

$$\begin{aligned} \vec{E}_1 &= E_{1,t} \hat{a}_t + E_{1,n} \hat{a}_n \\ &= (E_1 \sin \theta_1) \hat{a}_t + (E_1 \cos \theta_1) \hat{a}_n \end{aligned}$$

$$\begin{aligned} \vec{E}_2 &= E_{2,t} \hat{a}_t + E_{2,n} \hat{a}_n \\ &= (E_2 \sin \theta_2) \hat{a}_t + (E_2 \cos \theta_2) \hat{a}_n \end{aligned}$$

Derivation of Refraction Law

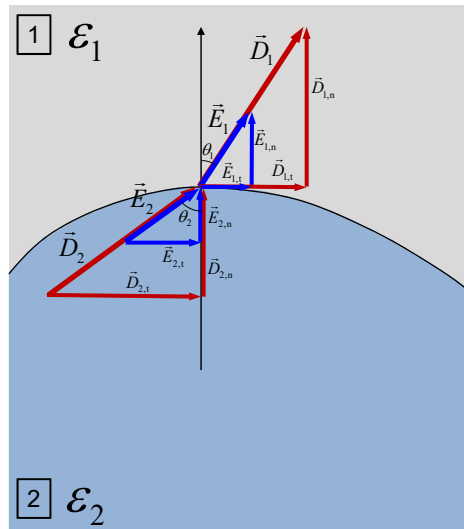


Apply the boundary conditions for tangential components.

$$\begin{aligned} E_{1,t} &= E_{2,t} \\ E_1 \sin \theta_1 &= E_2 \sin \theta_2 \end{aligned}$$

Apply the boundary conditions for normal components.

$$\begin{aligned} \epsilon_1 E_{1,n} &= \epsilon_2 E_{2,n} \\ \epsilon_1 E_1 \cos \theta_1 &= \epsilon_2 E_2 \cos \theta_2 \end{aligned}$$

Derivation of Refraction Law

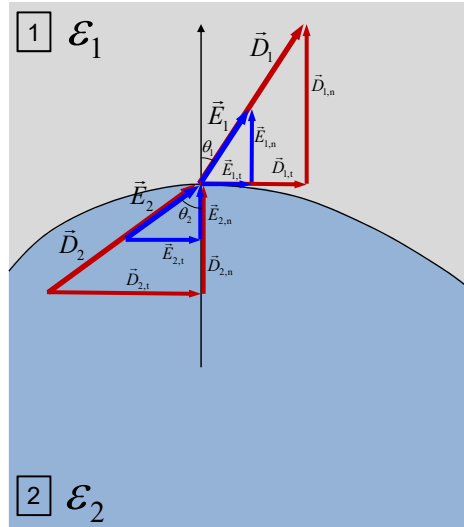

We now have

$$E_1 \sin \theta_1 = E_2 \sin \theta_2$$

$$\epsilon_1 E_1 \cos \theta_1 = \epsilon_2 E_2 \cos \theta_2$$

Divide these equations to get

$$\frac{E_1 \sin \theta_1}{\epsilon_1 E_1 \cos \theta_1} = \frac{E_2 \sin \theta_2}{\epsilon_2 E_2 \cos \theta_2}$$

Simplify

$$\frac{\tan \theta_1}{\epsilon_1} = \frac{\tan \theta_2}{\epsilon_2}$$


This is NOT Snell's law.

Electrostatic Devices


Slide 21

Boundary Conditions for Dielectric-Conductor Interface

Analysis Setup



1 ϵ_1

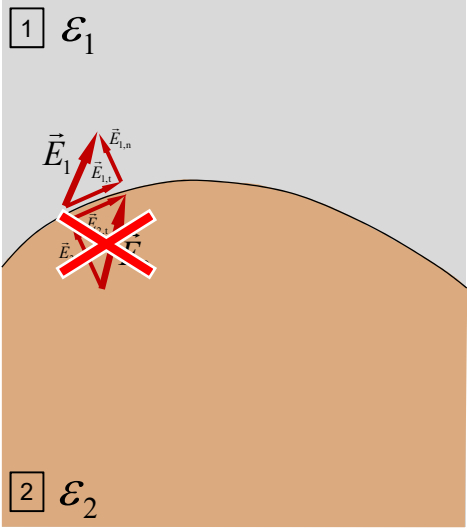

2 ϵ_2

We start like we did for the dielectric-dielectric interface.

Assume the conductor is perfect.

$$\sigma \rightarrow \infty$$


Recall Ohm's law

$$\vec{J} = \sigma \vec{E}$$


In order for J not to be infinite, $E = 0$ inside the conductor.

Electrostatic Devices
Slide 23

Analysis Setup



1 ϵ_1

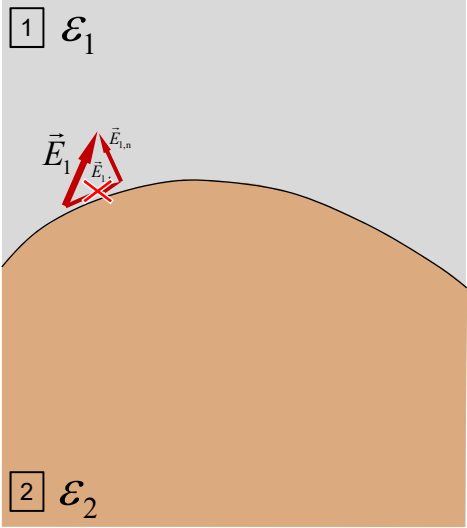


2 ϵ_2

If $E_{2,t}$ is zero, then

$$E_{1,t} = 0$$


Electrostatic Devices
Slide 24

Analysis Setup



1 \mathcal{E}_1

$\vec{E}_1 = \vec{E}_{1,n}$

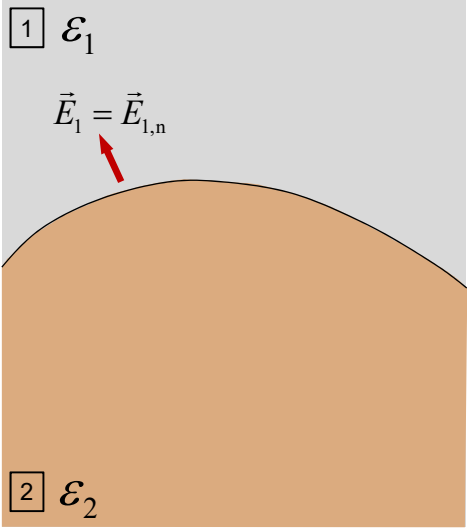


2 \mathcal{E}_2

There can only be a normal component for the electric field at the interface with a perfect conductor.

$$\vec{E}_1 = E_{1,n} \hat{a}_n$$

Electrostatic Devices
Slide 25

Notes About Perfect Conductors



- No electric field can exist inside of a perfect conductor (i.e. $\vec{E} = 0$).
- Electric potential V is constant throughout a perfect conductor (i.e. $\nabla^2 V = 0$).
- The electric field at the boundary has no tangential component. The electric field can only be normal at the interface to a metal.

Electrostatic Devices
Slide 26

Examples

Example #1




Let there be an interface between two semi-infinite media in the x - y plane. The dielectric constant of the first medium is 2.0 and the second medium is 4.4.

1. Given that the electric flux density in medium 1 is $\vec{D}_1 = 2.1\hat{a}_x + 0.7\hat{a}_y + 1.5\hat{a}_z$, calculate the electric flux density in medium 2.
2. Calculate the angle \vec{D}_1 makes with the interface.
3. Using the law of refraction, calculate the angle \vec{D}_2 makes with the interface.

Example #1 – Problem Setup



We start by visualizing the problem and setting up the coordinates.

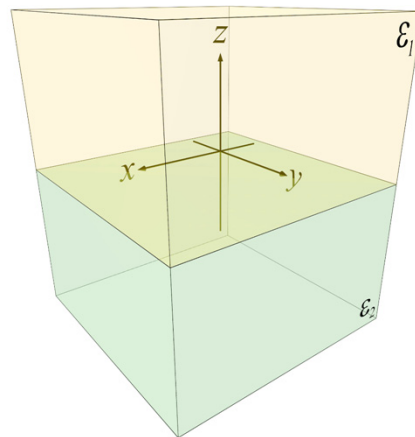

Electrostatic Devices

Slide 29


Example #1 – Problem Setup



We start by visualizing the problem and setting up the coordinates.

Plot \vec{D}_1 .

$$\vec{D}_1 = 2.1\hat{a}_x + 0.7\hat{a}_y + 1.5\hat{a}_z$$

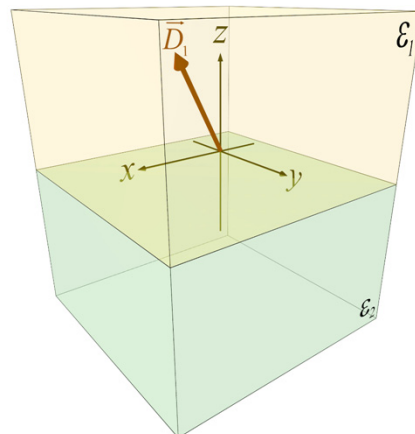

Electrostatic Devices

Slide 30


Example #1 – Part 1



Separate \vec{D}_1 into tangential and normal components.

$$\vec{D}_1 = \underbrace{2.1\hat{a}_x + 0.7\hat{a}_y}_{\text{Tangential}} + \underbrace{1.5\hat{a}_z}_{\text{Normal}}$$

$$\vec{D}_{1,t} = 2.1\hat{a}_x + 0.7\hat{a}_y \quad \vec{D}_{1,n} = 1.5\hat{a}_z$$

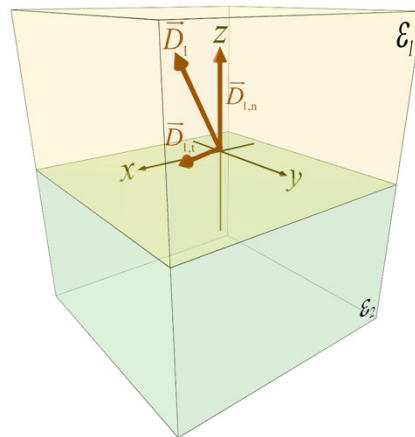

Electrostatic Devices

Slide 31


Example #1 – Part 1



Apply boundary condition for normal component.

$$\vec{D}_{1,n} = \vec{D}_{2,n}$$

$$1.5\hat{a}_z = \vec{D}_{2,n}$$

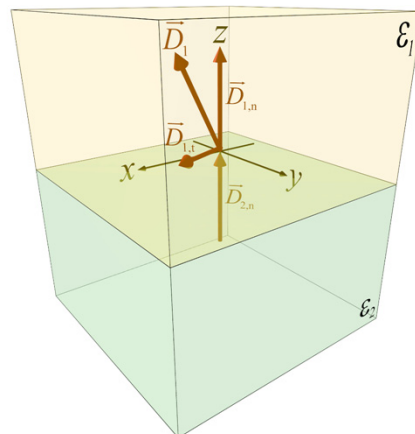

Electrostatic Devices

Slide 32

Example #1 – Part 1




Apply boundary condition for tangential component.

$$\frac{\vec{D}_{1,t}}{\epsilon_1} = \frac{\vec{D}_{2,t}}{\epsilon_2}$$

$$\vec{D}_{2,t} = \frac{\epsilon_2}{\epsilon_1} \vec{D}_{1,t}$$

$$\vec{D}_{2,t} = \frac{4.4}{2.0} (2.1\hat{a}_x + 0.7\hat{a}_y)$$

$$\vec{D}_{2,t} = 4.62\hat{a}_x + 1.54\hat{a}_y$$

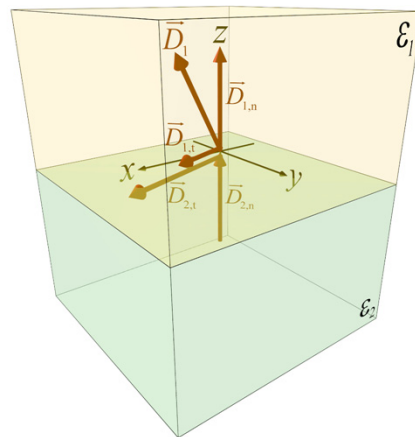

Electrostatic Devices

Slide 33

Example #1 – Part 1




Gather both components to get overall \vec{D}_2 .

$$\vec{D}_2 = \vec{D}_{2,t} + \vec{D}_{2,n}$$

$$\vec{D}_2 = (4.62\hat{a}_x + 1.54\hat{a}_y) + (1.5\hat{a}_z)$$

$$\vec{D}_2 = 4.62\hat{a}_x + 1.54\hat{a}_y + 1.5\hat{a}_z$$

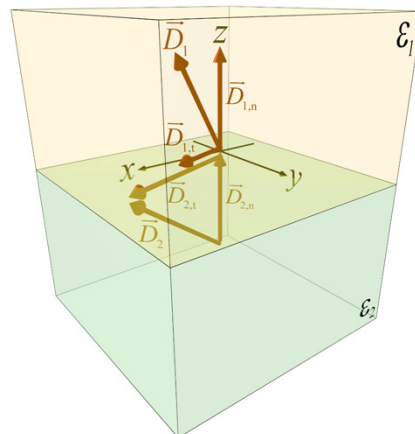

Electrostatic Devices

Slide 34

Example #1 – Part 2



Calculate the angle θ_1 of \vec{D}_1 .

Recall the property of dot products.

$$\vec{A} \cdot \vec{B} = |\vec{A}| |\vec{B}| \cos \theta_{AB}$$

We can calculate θ_1 by letting


$$\vec{A} = \vec{D}_1$$

$$\vec{B} = \hat{a}_z$$

$$\theta_{AB} = \theta_1$$

Our dot product becomes

$$\vec{D}_1 \cdot \hat{a}_z = |\vec{D}_1| |\hat{a}_z| \cos \theta_1$$

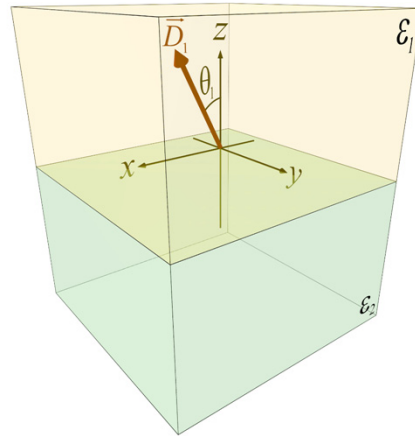

Electrostatic Devices

Slide 35

Example #1 – Part 2



Continued...

Solve the dot product equation for θ_1 .


$$\vec{D}_1 \cdot \hat{a}_z = |\vec{D}_1| |\hat{a}_z| \cos \theta_1$$

$$D_z = |\vec{D}_1| \cos \theta_1$$

$$\theta_1 = \cos^{-1} \left(\frac{D_z}{|\vec{D}_1|} \right)$$

$$\theta_1 = \cos^{-1} \left(\frac{1.5}{\sqrt{(2.1)^2 + (0.7)^2 + (1.5)^2}} \right)$$

$$\theta_1 = 55.9^\circ$$

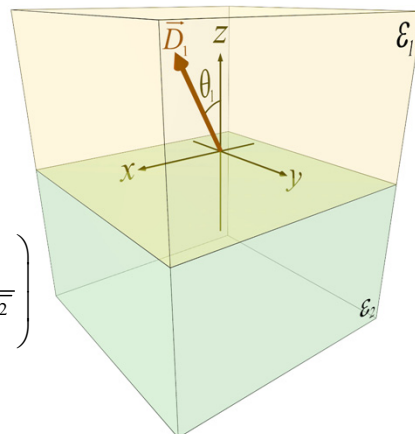

Electrostatic Devices

Slide 36

Example #1 – Part 2



Calculate the angle θ_2 of \vec{D}_2 .

The law of refraction is

$$\frac{\tan \theta_1}{\epsilon_1} = \frac{\tan \theta_2}{\epsilon_2}$$

Solving this for θ_2 gives

$$\theta_2 = \tan^{-1} \left(\frac{\epsilon_2}{\epsilon_1} \tan \theta_1 \right)$$

$$\theta_2 = \tan^{-1} \left(\frac{4.4}{2.0} \tan 55.9^\circ \right)$$

$$\theta_2 = 72.9^\circ$$

